



RGBW LED Flood Light

50W/100W

RF Wireless remote control

RGBW

RGBW LED Flood Light



PRODUCT FEATURES

- RGBW RF Wireless remote control
- 44 key remote control
- Memory function
- Timing function
- DIY 1000 Colors & 6 Modes
- Brightness adjustable .

RGBW LED Flood Light

FL50LEDRGB

Specifications

Electrical Data

Wattage	50W
Voltage	100–277V AC
Waterproof	IP66

Optical Data

Color temperature	RGBW
PF	>0.9
Beam Angle	120°

Others

Material	Aluminum
Working Temperature	–20°C – 50°C
Size	200*145 *28. 5mm
Warranty	3years



RGBW LED Flood Light

FL100LEDRGB

Specifications

Electrical Data

Wattage	100W
Voltage	100–277V AC
Waterproof	IP66

Optical Data


Color temperature	RGBW
PF	>0.9
Beam Angle	120°

Others

Material	Aluminum
Working Temperature	–20°C – 50°C
Size	250*280*45mm
Warranty	3years



RGBW LED Flood Light

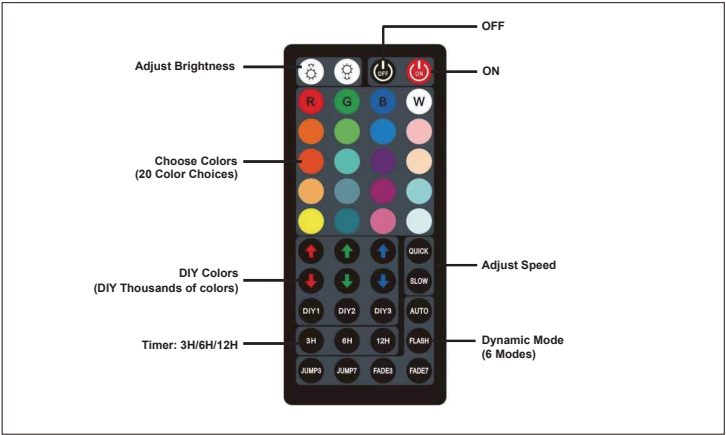

Brightness rise	Brightness fall	Off	On
Static red	Static green	Static blue	Static white
Static orange	Static light green	Static dark blue	Static milk white
Static dark yellow	Static cyan	Static lyons blue	Static white pink
Static yellow	Static light blue	Static purple	Static green-white
Static light yellow	Static sky blue	Static brown	Static blue white
Increase red	Increase green	Increase blue	Speed up
Decrease red	Decrease green	Decreaseblue	Speed-down
DIY key1	DIY key2	DIY key3	Automaticchange
key3H	key6H	key12H	Flash on and off
3 color jumpy change	7 color jumpy change	3 color fade change	7 color fade change

Direction for use

- Connect the load wire at first, following by the power wire; **Please ensure short circuit can not occur between connecting wire before you turn on the power;**
- Operation: you will receive infrared remote control in front of infrared receiver to ensure that there is no barrier between the remote controller and receiver.
The key-press functions are shown in the table as below (in accordance with the key position order):

Direction:When switching to six dynamic mode, the button of "quick +"/"slow -" means the speed of light change is up/down.

Our product has the memory function, power automatically saved when the power is on a model state. Different environments, different from the remote control.

Warning

- It should by professional electrician technician to install the product , inspection , maintenance and rack-mounted.
- Before installing fixtures , make sure the power is turned off during the installation process.
- Make sure the circuit voltage is in the lamp operation voltage allowable range
- If the external flexible cable or cord of the luminaire is damaged, it should only be replaced by the qualified person.
- Lamp should working under the predetermined working temperature .

Warranty

3 years warranty for original purchaser of LED product that is identified on seller's invoice reflecting its original purchase(the "Product")

- The following circumstances will not be warranted :
- Damage caused by force majeure such as war,riots,sabotage,cyclones,earthquakes,tidal waves, flooding,fire,lighting strikes etc.
- Damage caused by user's improper delivery.defects caused by wrong operation,wrong treatment and destruction of machinery
- Damage caused by buyer or installer using bad quality cable or other mismatching electronic parts.
- With the quality problem during warranty time , our company will choose to repair / replacement parts , or replace the product , or other methods to slove them . Beyond the warranty time , will take some materials costs , labor costs.