



LED Wall Light





Parameters

Optical Parameters

CCT	3000K/4200K/6000K
Lumen Output(lm)±5%	2000lm
Lumen Efficacy(LPS)±5%	80lm/W
LED Type/Qt'y	SMD 96pcs
CRI/SDCM	>80/<6

Electrical Parameters

Rated Power(w)±5%	25W
Rated/Actual Input	220-240Vac
Driver Output Data	140Vdc/160mA
Power Factor/THD/PE	>0.5
Driver/Connection	Integrated
Over Load/Short Circuit	Protection
Hi-pot Test Range	Non-Isolated driver, 3000Vdc/5mA/60S



Life

Warranty	2 years
Lumen Maintenance 70%	25000hrs
LM70	96% lumen maintenance@6000hrs

Others

IP/IK/Glow-wire	IP65/IK08 650°C
Temp./Humidity	Working:-20°C~45°C Storage:<70°C

Flux out:1618 lm


Height	Eavg, Emax	Angle:119.09deg	Diameter
1m	171.6, 683.81x		340.14cm
2m	42.91, 171.01x		680.27cm
3m	19.07, 75.981x		1020.41cm
4m	10.73, 42.741x		1360.54cm
5m	6.865, 27.351x		1700.68cm
6m	4.768, 19.001x		2040.81cm
7m	3.503, 13.961x		2380.95cm
8m	2.682, 10.681x		2721.08cm
9m	2.119, 8.4421x		3061.22cm
10m	1.716, 6.8381x		3401.35cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Product Dimension: 320X130X100mm



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

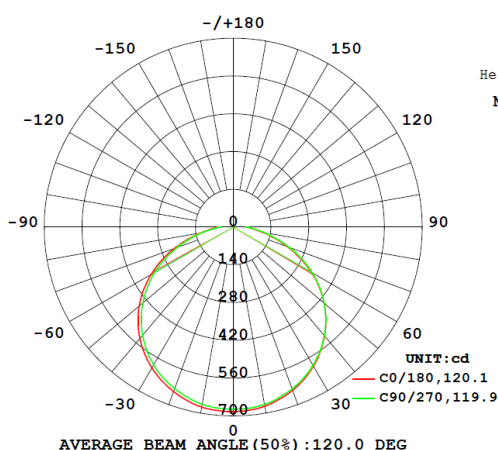

Quality LED Lighting