




LED Ultra Output Batten



Parameters

Optical Parameters	
CCT	3000\4000\6000K
Lumen Output(lm)±5%	4350lm/7040lm
Lumen Efficacy(LPS)±5%	135lm/W
LED Type/Qt'y	SMD 272pcs
CRI/SDCM	>80/<6
Electrical Parameters	
Rated Power(w)±5%	33W/53W
Rated/Actual Input	220-240Vac
Driver Output Data	90-105VDC 450mA
Power Factor/THD/PE	>0.9
Driver/Connection	Integrated
Over Load/Short Circuit	Protection
Hi-pot Test Range	SELV Isolated driver, 2000Vdc/5mA/60S
Life	
Warranty	5 years
Lumen Maintenance 70%	50000hrs
LM80	97.34% lumen maintance@6000hrs
Others	
IP/IK/Glow-wire	IP20 /IK08/650℃
Temp./Humidity	Working:-20℃~45℃ Storage:<70℃

Product Dimension

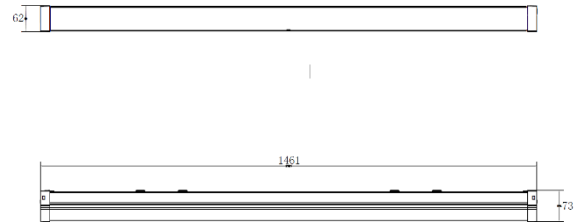

Emergency information	
Battery Specification	6.4V 1500mAh LiFePO4
Emergency Duration	3 Hours Minimum
Battery Warranty	4 Years
Emergency Light Level	220lm

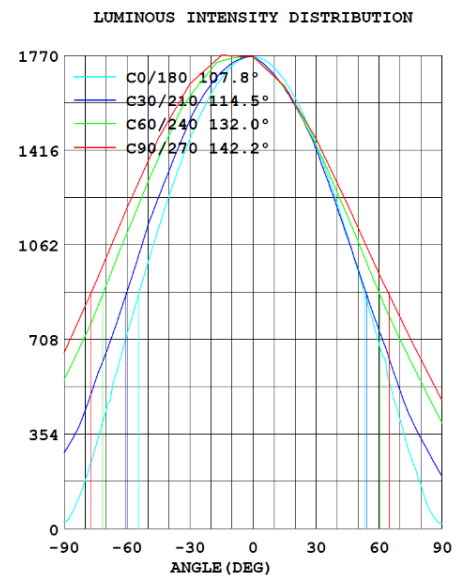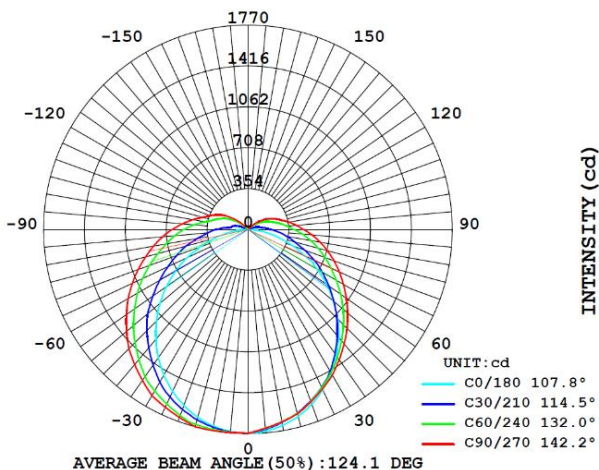

Quality LED Lighting