





IP54 LED BULKHEAD BHPAROCCT PARAMETERS	
Optical Parameters	
ADJUSTABLE COLOUR TEMPERATURE	3000K/4000K/6000K
LUMEN OUTPUT/ WATT	9W/850 LUMENS 12W/1050LUMENS 18W/1450LUMENS
ADJUSTABLE WATT	9W/12W/18W
REDENERING INDEX	>80
LED TYPE/QTYS	SMD2835/176PCS
Electrical Parameters	
ADJUSTABLE WATT	9W/12W/18W
IMPUT VOLTAGE	240V AC
POWER FREQUENCY	50HZ
MAX POWER OUTPUT	18W
POWER FACTOR	>0.9
DRIVER	INTEGRATED
Life	
WARRANTY	3 YEAR
LIFE SPAN	25000H
SWITCHING CYCLE	50000TIMES
Other	
BEAN ANGLE	120
IK RATED	IK10
IP RATED	IP54
RALATED CERTIFICATE	CE/ UKCA ROHS
ERP COMPLIANT	YES
WORKING TEMPERATURE	from -15 to 70 °C
Non-directional (NDLS) or directional (DLS)	DLS
Light source cap-type (or other electric interface)	No Cap type
Mains (MLS) or non-mains (NMLS)	MAINS
Energy Efficiency Class	F
SHAPE	ROUND
DIMENSIONS	211X55MM



DIMENSIONS: 211X55MM

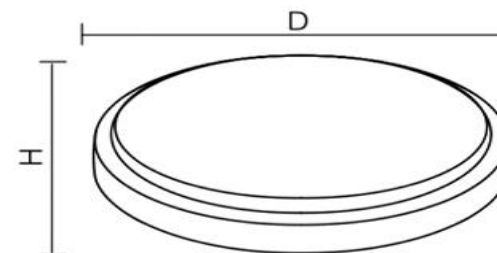

LUMINOUS INTENSITY DISTRIBUTION

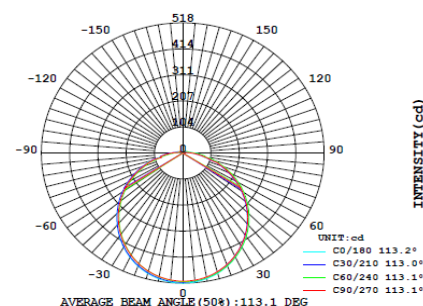

LUMINOUS INTENSITY DISTRIBUTION

