




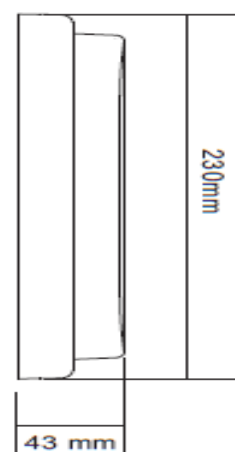

Product		Product Dimension	
BH18WOVLED			
LED CEILING LIGHTING Parameters			
Optical Parameters			
CCT	3000K/4000K/6000K		
Lumen Output	1350lm/1500lm/1400lm		
Lumen Efficacy	75/83/77 lm/w		
LED Type/Qty	SMD2835/144pcs		
CRI/SCDM	>80/<6		
Electrical Parameters			
Rated Power	18W		
Rated/Actual Input	AC220/240V		
Driver Output Date	DC81V/200mA		
Driver Factory	>0.5		
Over Load/Short Circuit	Protection		
Hi-pot Test Range	3000V/5mA/60s		
Flicker metric (Pst LM)	≤1		
Stroboscopic effect metric (SVM)	≤0.4		
Life			
Warranty	30000hrs		
LuLumen maintenance	96% /3600 h		
Lm80	L70 Lifetime:>36000 hours		
Others			
IP/IK/Glow-wire	IP54/IK10/850°C		
Temp./Humidity	Working:-20°C~45°C Storage:<70°C		

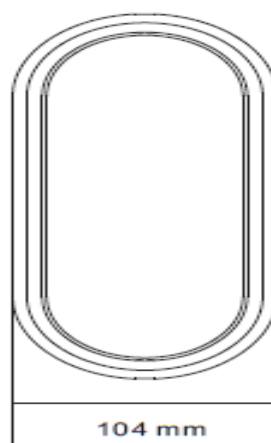

C Plane Distribution Diagram

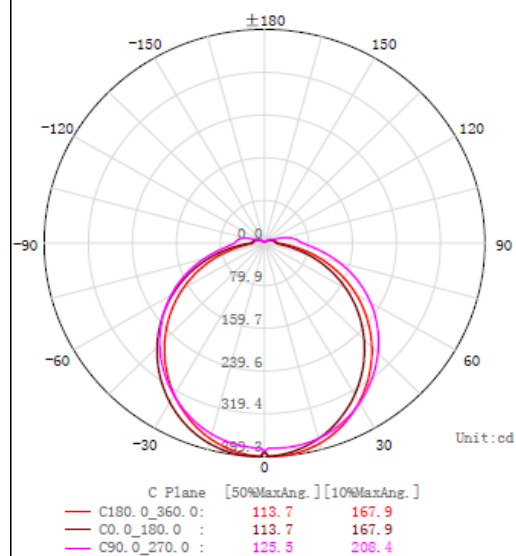

Illuminance-Distance Curve

