Greenlamp
LED RETROFIT LAMPS

100LM/W 6060 C C T LED Panel

Products Description

* Simple structure, low failure rate, easy to maintain and repair.
* No LGP inside, anti-yellowish.
* Wide PCB of light sources (SMD) with super heat radiation, low light decay and long lifespan.
* PMMA optic lenses with high light transmission rate, and larger beam angle.

Products Dimens

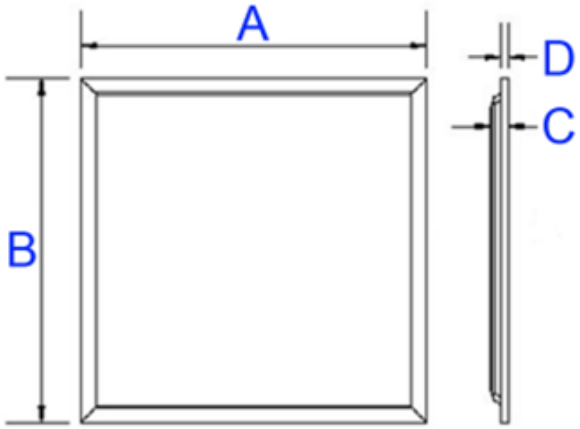

Panel: A=595mm B=595mm C=30mm D=9mm

Parameters

Optical Parameters	
CCT	3000K-4000K-6000K
Lumen Output(lm) ±5%	4000
Lumen Efficacy(LPS)±5%	80
LED Type/Qt'y	San'an chip/2835 104pcs
CRI/SDCM	>80/<6
Electrical Parameters	
Rated Power(w)±5%	40
Rated/Actual Input	220~240Vac 50/60Hz
Driver Output Data	25-42Vdc / 1000mA/ 4 0 W
Power Factor/THD/PE	>90%/<20/88%
Driver/Connection	Removable Driver / PIP
Over Load/Short Circuit	Protection
Surge/Protection Class IEC	>1KV / Class II
Life	
Warranty	5 years
Lumen Maintenance 70%	30,000hrs
LM80	
Others	
IP/IK/Glow-wire	IP20/IK06/650℃
Temp./Humidity	Working: -20℃~40 ℃ Storage:<60 ℃
Net Weight	1.85kg

Certification:

TÜV CE RoHS

Photometric Diagram

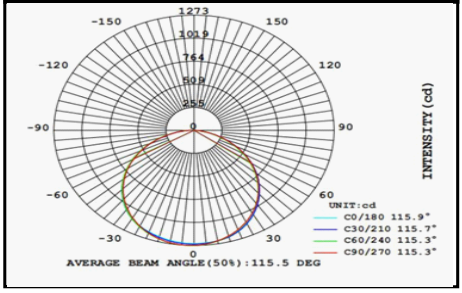

AVERAGE AND CENTER E Figure

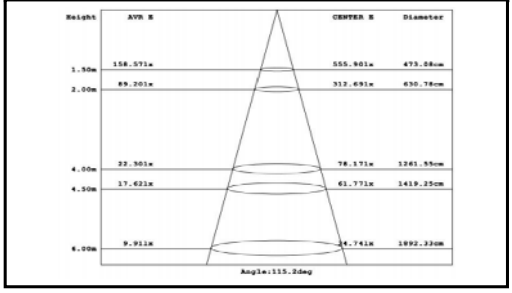

Installation

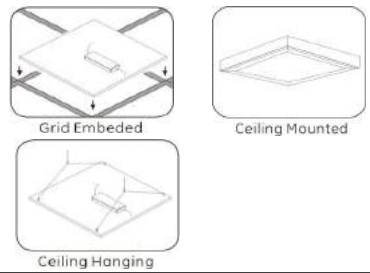

Quality LED Lighting

Phone : 00353-1-4541005 fax : 00353-1-4541015 email : Michael@presliteireland.com