

100LM/W 60 X 120 LED Panel



Products Description

- * Simple structure, low failure rate, easy to maintain and repair.
- * No LGP inside, anti-yellowish.
- * Wide PCB of light sources (SMD) with super heat radiation, low light decay and long lifespan.
- * PMMA optic lenses with high light transmission rate, and larger beam angle.

Parameters

Optical Parameters

CCT 3000/4000/6000K

Lumen Output(lm) $\pm 5\%$ 6000

Lumen Efficacy(LPS) $\pm 5\%$ 100

LED Type/Qt'y San'an chip/2835 7 2 pcs

CRI/SDCM $>80 / <6$

Electrical Parameters

Rated Power(w) $\pm 5\%$ 60

Rated/Actual Input 220~240Vac 50/60Hz

Driver Output Data 25-42Vdc / 1000mA/ 60 W

Power Factor/THD/PE $>90\% / <20/88\%$

Driver/Connection Removable Driver / PIP

Over Load/Short Circuit Protection

Surge/Protection Class $>1KV$ / Class II
IEC

Life

Warranty 5 years

Lumen Maintenance 70% 30,000hrs

LM80


Others

IP/IK/Glow-wire IP20/IK06/650°C

Temp./Humidity Working: $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$ Storage: $<60^{\circ}\text{C}$

Net Weight 3.75kg

Products Dimens

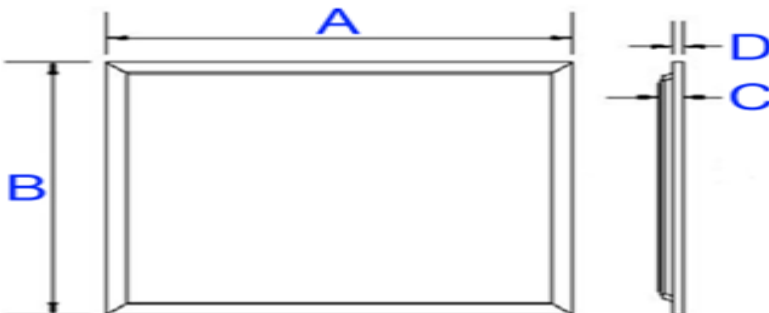


Panel: A=1195mm B=595mm C=30mm D=9mm


Certification:




Photometric Diagram



AVERAGE AND CENTER E Figure



Installation

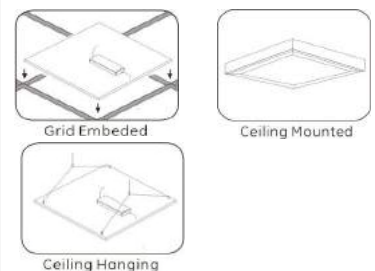

Quality LED Lighting