



LED Slim Wall Pack

Parameters

Optical Parameters

CCT	3000K/4000K/6000K
Lumen Output(lm)±5%	3100lm
Lumen Efficacy(LPS)±5%	100lm/W
LED Type/Qt'y	SMD 48pcs
CRI/SDCM	>80/<6

Electrical Parameters

Rated Power(w)±5%	21W/31W
Rated/Actual Input	220-240Vac
Driver Output Data	129Vdc/220mA
Power Factor/THD/PE	>0.9
Driver/Connection	Integrated
Over Load/Short Circuit	Protection
Hi-pot Test Range	SELV Isolated driver, 3000Vdc/5mA/60S

Life

Warranty	5 years
Lumen Maintenance 70%	40000hrs
LM80	97.34% lumen maintance@6000hrs


Others

IP/IK/Glow-wire	IP65/IK08 650°C
Temp./Humidity	Working:-20°C~45°C Storage:<70°C



Emergency information

installation Requirements	Wired as maintained and controlled using the microwave sensor
Battery Specification	6.4V 1500mAh LiFePo4
Emergency Duration	3 Hours Minimum
Battery Warranty	4 Years
Emergency Light Level	220lm

Product Dimension: 306*265*110mm

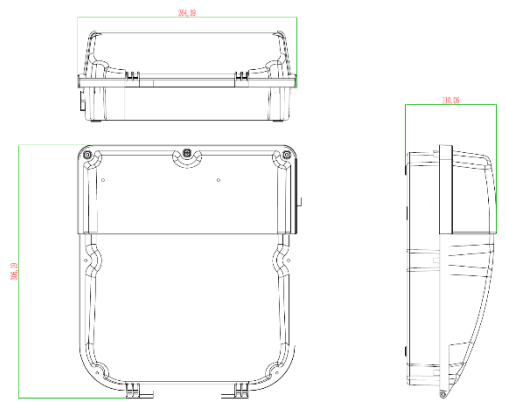

LUMINOUS INTENSITY DISTRIBUTION

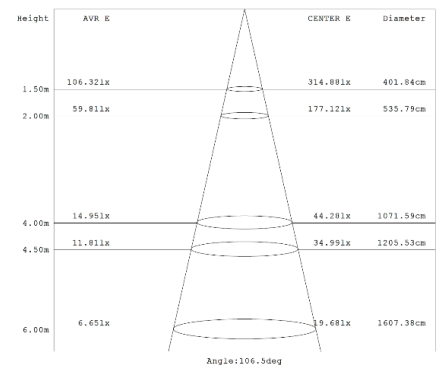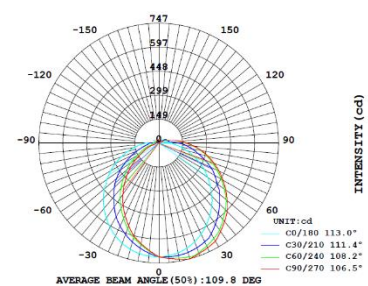

Quality LED Lighting