



LED DUSTPROOF LIGHTING



Parameters

Optical Parameters	
CCT	3000K/4000K/6000K
Lumen Output(lm)±5%	7250lm
Lumen Efficacy(LPS)±5%	125lm/W
LED Type/Qt'y	SMD320pcs
CRI/SDCM	>80/<6
Electrical Parameters	
Rated Power(w)±5%	58W
Rated/Actual Input	180-240Vac
Driver Output Data	45Vdc/380mA
Power Factor/THD/PE	>0.9
Driver/Connection	Integrated
Over Load/Short Circuit	Protection
Hi-pot Test Range	SELV Isolated driver, 3000Vdc/5mA/60S
Life	
Warranty	5 years
Lumen Maintenance 70%	40000hrs
LM80	97.34% lumen maintance@6000hrs
Others	
IP/IK/Glow-wire	IP20/IK08/850℃
Temp./Humidity	Working:-20℃~45℃ Storage:<70℃

Product Dimension



IK08   IP20

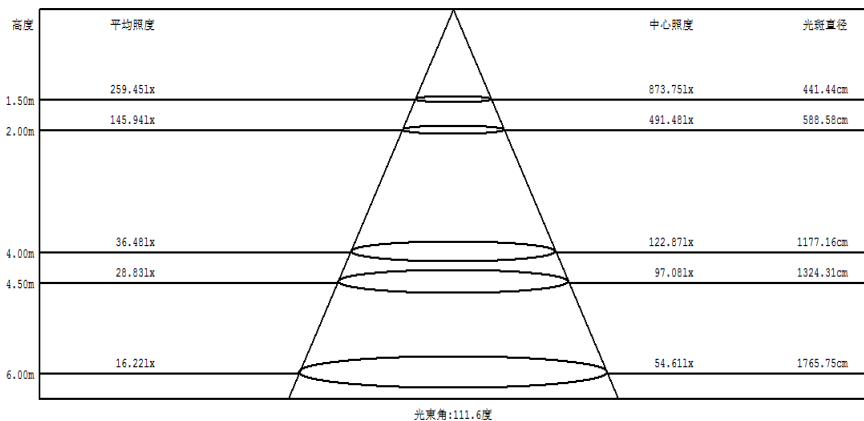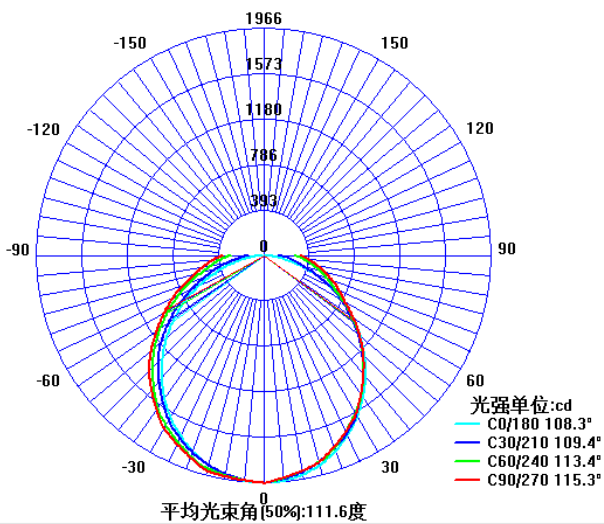

Quality LED Lighting