



COB10RO LED BULKHEAD

Parameters

Optical Parameters

CCT	3000K/4000K/6000K
Lumen Output(lm)±5%	1000lm
Lumen Efficacy(LPS)±5%	100lm/W
LED Type/Qt'y	SMD60pcs
CRI/SDCM	>80/<6

Electrical Parameters

Rated Power(w)±5%	10W
Rated/Actual Input	220-240Vac
Driver Output Data	40Vdc/260mA
Power Factor/THD/PE	>0.7
Driver/Connection	Non Isolated driver
Over Load/Short Circuit	Protection
Hi-pot Test Range	1000Vdc/5mA/60S


Life


Warranty	5 years
Lumen Maintenance 70%	40000hrs
LM80	97.34% lumen maintance@6000hrs


Others

IP/IK/Glow-wire	IP65/IK08/850℃
Temp./Humidity	Working:-20℃~45℃ Storage:<70℃


Product Dimension

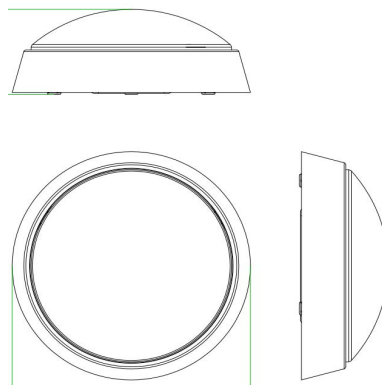

IK08   **IP65**

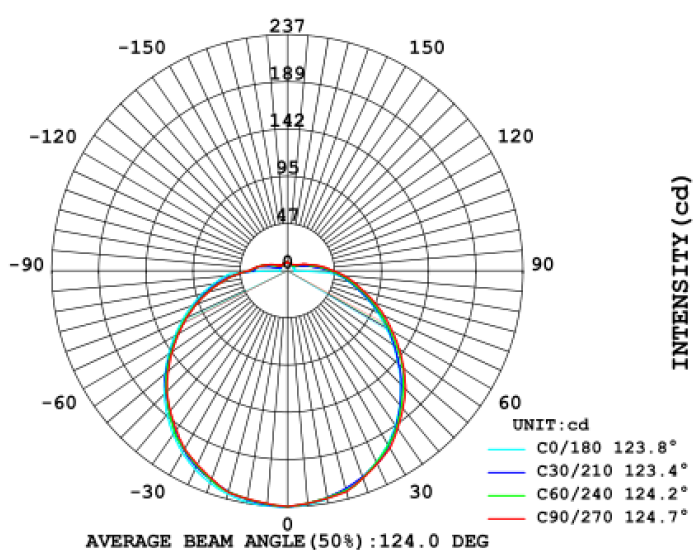

LUMINOUS INTENSITY DISTRIBUTION

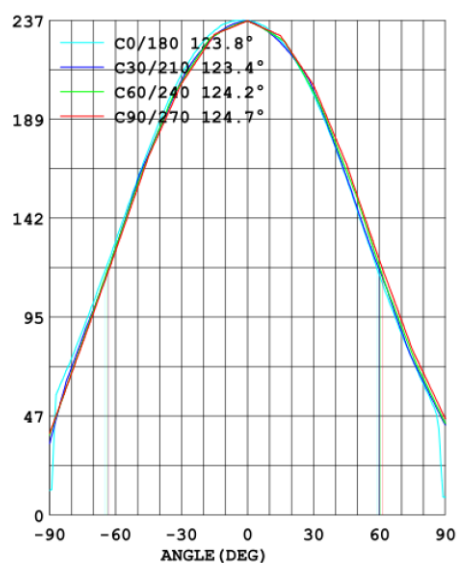

Quality LED Lighting