



SATILLITE BLADE LIGHT

Parameters

Optical Parameters

CCT	6000K
Lumen Output(lm)±5%	150lm
Lumen Efficacy(LPS)±5%	30lm/W
LED Type/Qt'y	SMD20pcs
CRI/SDCM	>80/<6

Electrical Parameters

Rated Power(w)±5%	5W
Rated/Actual Input	180-240Vac
Driver Output Data	48Vdc350mA
Power Factor/THD/PE	>0.5
Driver/Connection	Integrated
Over Load/Short Circuit	Protection
Hi-pot Test Range	SELV Isolated driver, 2000Vdc/5mA/60S




Life

Warranty	3 years
Lumen Maintenance 70%	30000hrs
LM80	97.34% lumen maintance@6000hrs

Others

IP/IK/Glow-wire	IP20/IK08/850°C
Temp./Humidity	Working:-20°C~45°C Storage:<70°C

Product Dimension

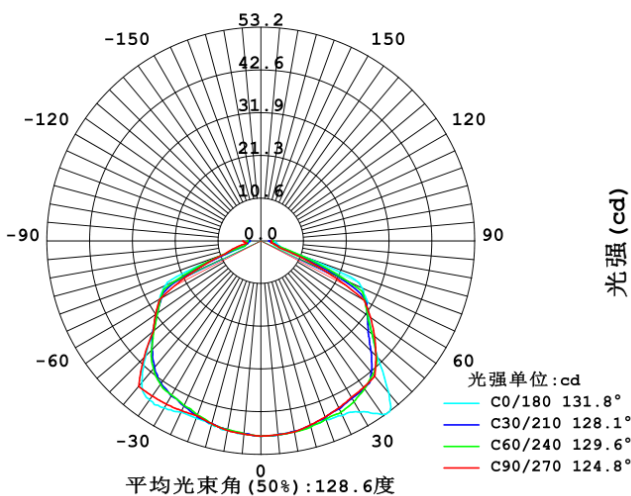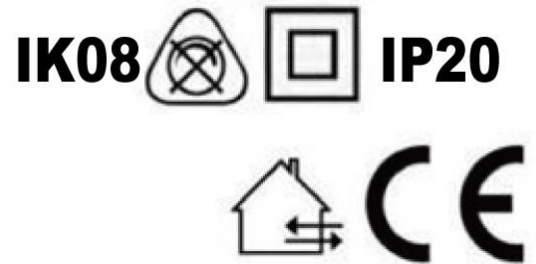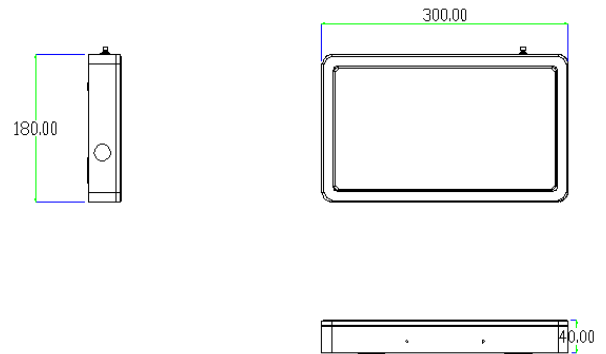

高度	平均照度	中心照度	光斑直径
1.50m	7.79lx	21.62lx	429.72cm
2.00m	4.38lx	12.16lx	572.96cm
4.00m	1.10lx	3.04lx	1145.91cm
5.00m	0.70lx	1.95lx	1432.39cm
10.00m	0.18lx	0.49lx	2864.79cm

光束角: 110.2度

Quality LED Lighting