



LED DOWNLIGHT NEP7WCCT

Parameters

Optical Parameters

CCT	3000K-4000K-6500K
Lumen Output(lm)±5%	560lm
Lumen Efficacy(LPS)±5%	80lm/W
LED Type/Qt'y	SMD 18PCS
CRI/SDCM	> 80/ < 6

Electrical Parameters

Rated Power(w)±5%	7W
Rated/Actual Input	220-240V
Driver Ooutput Data	54V 100mA
Power Factor/THD/PE	> 0.5
Driver/Connection	Integrated
Over Load/Short Circuit	Protection
Hi-pot Test Range	Non-Isolated driver, 3000Vdc/5mA/60S


Life

Warranty	2 years
Lumen Maintenance	20000hrs
LM80	95% lumen maintance@6000hrs

Others

IP/IK/Glow-wire	Facade IP54/IK04/650°C
Temp./Humidity	Working:-20°C~45°C Storage:<70°C

Product Dimension

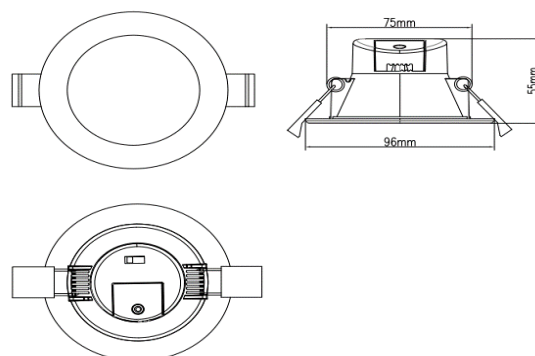

IK04



Facade IP54

