







LED Wall Light

Parameters


Optical Parameters	
CCT	3000K
Lumen Output(lm)±5%	1200lm
Lumen Efficacy(LPS)±5%	100lm/W
LED Type/Qt'y	SMD 12pcs
CRI/SDCM	>80/<6
Electrical Parameters	
Rated Power(w)±5%	12W
Rated/Actual Input	220-240Vac
Driver Output Data	54Vdc/175mA
Power Factor/THD/PE	>0.9
Driver/Connection	Integrated
Over Load/Short Circuit	Protection
Hi-pot Test Range	Non-Isolated driver, 3000Vdc/5mA/60S
Life	
Warranty	2 years
Lumen Maintenance 70%	25000hrs
LM70	96% lumen maintance@6000hrs
Others	
IP/IK/Glow-wire	IP65/IK08 650°C
Temp./Humidity	Working:-20°C~45°C Storage:<70°C



Product Dimension: 144X80X63mm



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

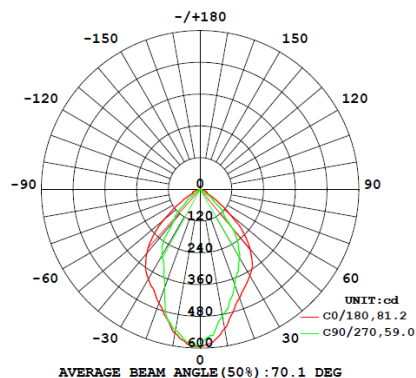

Flux out: 358.0 lm

Height	Eavg, Emax	Angle: 58.92deg	Diameter
1m	341.8, 595.1lx		112.97cm
2m	85.45, 148.8lx		225.93cm
3m	37.98, 66.12lx		338.90cm
4m	21.36, 37.19lx		451.87cm
5m	13.67, 23.80lx		564.83cm
6m	9.495, 16.53lx		677.80cm
7m	6.976, 12.14lx		790.76cm
8m	5.341, 9.298lx		903.73cm
9m	4.220, 7.347lx		1016.70cm
10m	3.418, 5.951lx		1129.66cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Quality LED Lighting