





Product		SL18WLEDCCT	Product Dimension	
LED CEILING LIGHTING Parameters				
Optical Parmeters				
CCT	3000K/4000K/6000K			
Lumen Output	1750lm/1800lm/1750lm			
Lumen Efficacy	97/100/97 lm/w			
LED Type/Qty	SMD2835/288pcs			
CRI/SCDM	>80/<6			
Electrical Parmeters				
Rated Power	18W			
Rated/Actual Input	AC220/240V			
Driver Output Date	DC72V/230mA			
Driver Factory	>0.5			
Over Load/Short Circuit	Protection			
Hi-pot Test Range	3000V/5mA/60s			
Flicker metric (Pst LM)	≤1			
Stroboscopic effect metric (SVM)	≤0.4			
Life				
Warranty	30000hrs			
LuLumen maintenance	96% /3600 h			
Lm80	L70 Lifetime:>36000 hours			
Others				
IP/IK/Glow-wire	IP54/IK10/850℃			
Temp./Humidity	Working:-20℃~45℃ Storage:<70℃			
		      		

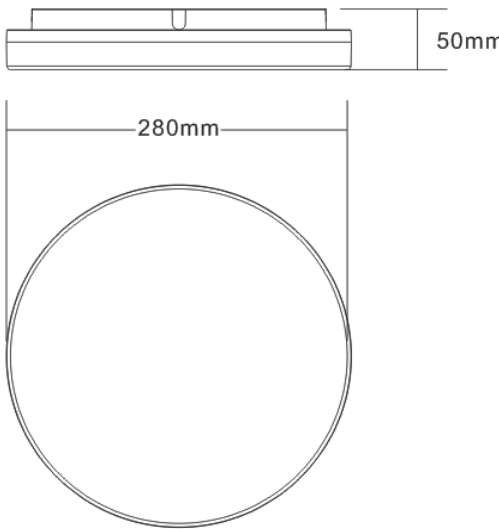

C Plane Distribution Diagram

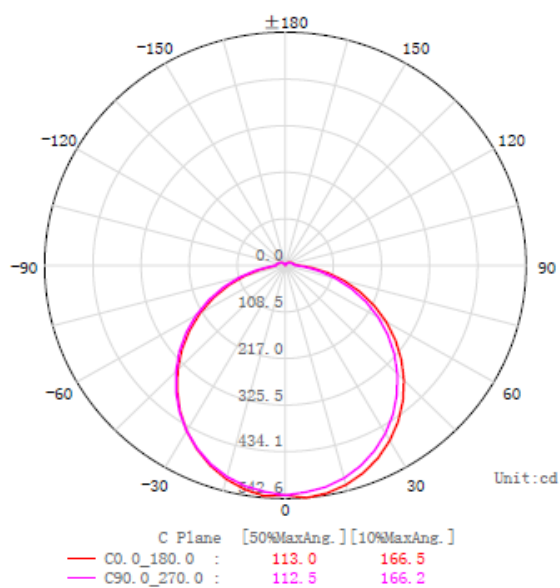

Illuminance-Distance Curve

