



LED BULKHEAD LIGHTING

Parameters

Optical Parameters

CCT	4000K
Lumen Output(lm)±5%	1170lm
Lumen Efficacy(LPS)±5%	90lm/W
LED Type/Qt'y	SMD60pcs
CRI/SDCM	>80/<6

Electrical Parameters

Rated Power(w)±5%	13W
Rated/Actual Input	220-240Vac
Driver Output Data	45Vdc/380mA
Power Factor/THD/PE	>0.9
Driver/Connection	Integrated
Over Load/Short Circuit	Protection
Hi-pot Test Range	SELV Isolated driver, 3000Vdc/5mA/60S

Life

Warranty	5 years
Lumen Maintenance 70%	40000hrs
LM80	97.34% lumen maintance@6000hrs

Others

IP/IK/Glow-wire	IP65/IK08/850°C
Temp./Humidity	Working:-20°C~45°C Storage:<70°C


Emergency information

Battery Specification	3.2V 1500mAh LiFePO4
Emergency Duration	3 Hours Minimum
Battery Warranty	4 Years
Emergency Light Level	160lm


Microwave information

Operating voltage	220 ~ 240 VAC 50/60Hz
Rated load	400W (Capacitive load) 800W (Resistive load)
Detection zone	Max.(DxH):12m x 6m
Detection angle	30°~150°
Hold time	5s/30s/90s/3min/20min/30min
Daylight sensor	2lux/10lux/25lux/50lux/Disable
HF System	5.8 GHz +/- 75MHz


Product Dimension

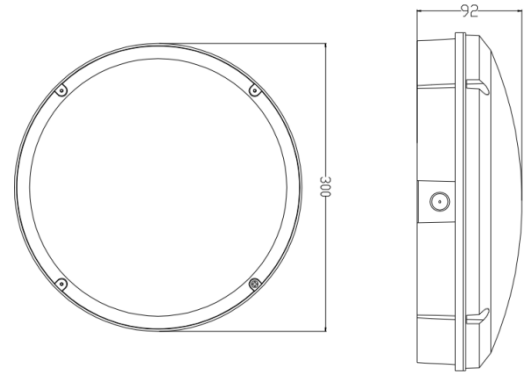

IK08 **IP65**

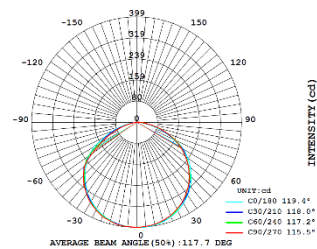

LUMINOUS INTENSITY DISTRIBUTION

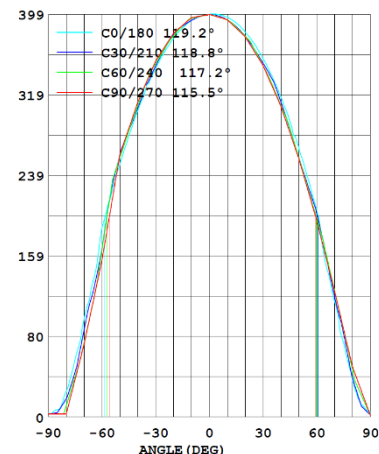

Quality LED Lighting