



Viper 5ft Batten - Wattage Select - CCT

Parameters

Optical Parameters

CCT	3000K/4000K/6000K
Lumen Output(lm)±5%	3900lm/6500lm
Lumen Efficacy(LPS)±5%	130lm/W
LED Type/Qt'y	SMD120pcs
CRI/SDCM	>80/<6

Electrical Parameters

Rated Power(w)±5%	30W/50W
Rated/Actual Input	220-240Vac
Driver Output Data	90Vdc/490mA
Power Factor/THD/PE	>0.9
Driver/Connection	Integrated
Over Load/Short Circuit	Protection
Hi-pot Test Range	Non Isolated driver, 500Vdc/5mA/60S


Life

Warranty	5 years
Lumen Maintenance 70%	40000hrs
LM80	97.34% lumen maintance@6000hrs

Others

IP/IK/Glow-wire	IP65/IK08/650°C
Temp./Humidity	Working:-20°C~45°C Storage:<70°C

Product Dimension

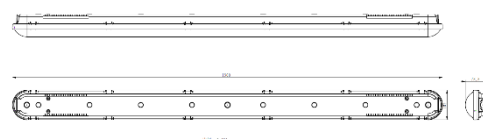

IP65

